


MG200J6ES61 (600V/200A 6in1)

High Power Switching Applications

Motor Control Applications

- Integrates inverter power circuit in to a single package.
- The electrodes are isolated from case.
- Low thermal resistance
- $V_{CE(sat)} = 2.0\text{ V (typ.)}$

Equivalent Circuit

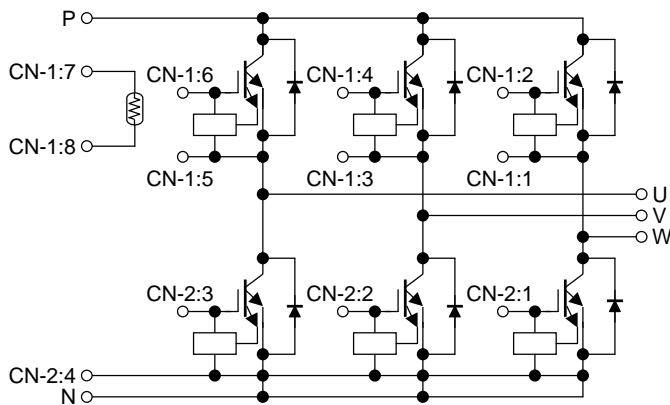

Signal Terminal

CN-1



- | | | | |
|----------|----------|----------|----------|
| 1. E (W) | 2. G (W) | 3. E (V) | 4. G (V) |
| 5. E (U) | 6. G (U) | 7. TH1 | 8. TH2 |

CN-2

- | | | | |
|----------|----------|----------|----------|
| 1. G (Z) | 2. G (Y) | 3. G (X) | 4. E (L) |
|----------|----------|----------|----------|


Package Dimensions:

Unit: mm

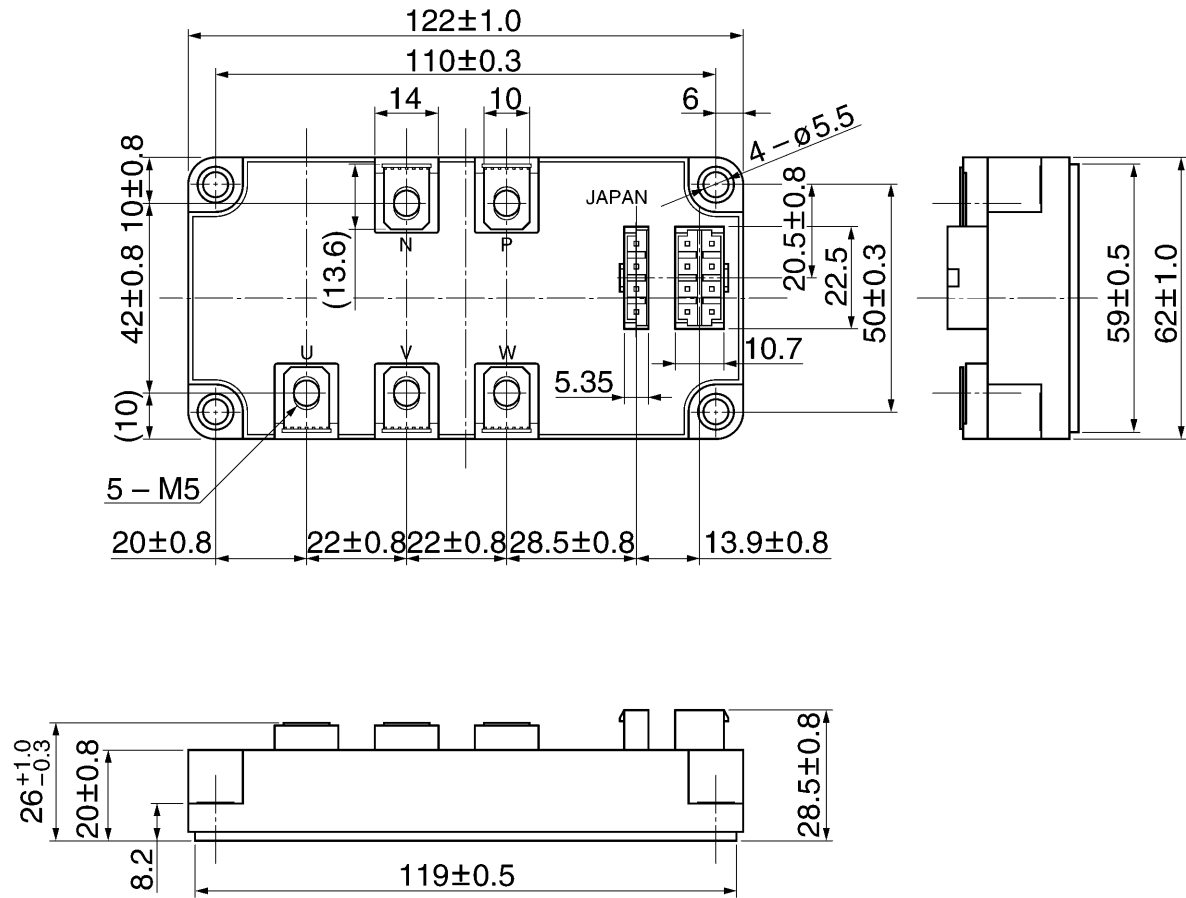

CN-1

- | | | | |
|----------|----------|----------|----------|
| 1. E (W) | 2. G (W) | 3. E (V) | 4. G (V) |
| 5. E (U) | 6. G (U) | 7. TH1 | 8. TH2 |



CN-2

- | | | | |
|----------|----------|----------|----------|
| 1. G (Z) | 2. G (Y) | 3. G (X) | 4. E (L) |
|----------|----------|----------|----------|

Maximum Ratings (Ta = 25°C)

| Stage | Characteristics | Symbol | Rating | Unit | |
|---|---------------------------|------------|-----------------|------|---|
| Inverter | Collector-emitter voltage | V_{CES} | 600 | V | |
| | Gate-emitter voltage | V_{GES} | ±20 | V | |
| | Collector current | DC | I_C | 200 | A |
| | | 1 ms | I_{CP} | 400 | |
| | Forward current | DC | I_F | 200 | A |
| | | 1 ms | I_{FM} | 400 | |
| Collector power dissipation (Tc = 25°C) | | P_C | 1000 | W | |
| Module | Junction temperature | T_j | 150 | °C | |
| | Storage temperature range | T_{stg} | -40~125 | °C | |
| | Isolation voltage | V_{isol} | 2500 (AC 1 min) | V | |
| | Screw torque | — | 3 (M5) | N·m | |

Electrical Characteristics (Tj = 25°C)

1. Inverter stage



| Characteristics | Symbol | Test Condition | Min | Typ. | Max | Unit | |
|--------------------------------------|------------------------|---|---------------------------|-------|------|------|---|
| Gate leakage current | I_{GES} | $V_{GE} = \pm 20 \text{ V}, V_{CE} = 0$ | — | — | ±500 | nA | |
| Collector cut-off current | I_{CES} | $V_{CE} = 600 \text{ V}, V_{GE} = 0$ | — | — | 1.0 | mA | |
| Gate-emitter cut-off voltage | $V_{GE} \text{ (off)}$ | $V_{CE} = 5 \text{ V}, I_C = 200 \text{ mA}$ | 5.0 | 6.5 | 8.0 | V | |
| Collector-emitter saturation voltage | $V_{CE} \text{ (sat)}$ | $V_{GE} = 15 \text{ V}, I_C = 200 \text{ A}$ | $T_j = 25^\circ\text{C}$ | — | 2.0 | 2.4 | V |
| | | | $T_j = 125^\circ\text{C}$ | — | — | 2.6 | |
| Input capacitance | C_{ies} | $V_{CE} = 10 \text{ V}, V_{GE} = 0, f = 1 \text{ MHz}$ | — | 40000 | — | pF | |
| Switching time | Turn-on delay time | $V_{CC} = 300 \text{ V}, I_C = 200 \text{ A}$ $V_{GE} = \pm 15 \text{ V}, R_G = 10 \Omega$ (Note 1) | — | — | 1.00 | μs | |
| | Turn-off time | | — | — | 1.20 | | |
| | Fall time | | — | — | 0.50 | | |
| Reverse recovery time | t_{rr} | | — | — | 0.30 | | |
| Forward voltage | V_F | $I_F = 200 \text{ A}$ | — | 2.2 | 2.6 | V | |

Note 1: Switching time test circuit & timing chart

2. Module (Tc = 25°C)

| Characteristics | Symbol | Test Condition | Min | Typ. | Max | Unit |
|-------------------------------------|------------------------|---------------------|-----|-------|-------|------|
| Zero-power resistance | R25 | ITM = 0.2 mA | — | 100 | — | kΩ |
| B value | B25/85 | Tc = 25°C/Tc = 85°C | — | 4390 | — | K |
| Junction to case thermal resistance | $R_{th} \text{ (j-c)}$ | Inverter IGBT stage | — | — | 0.125 | °C/W |
| | | Inverter FRD stage | — | — | 0.195 | |
| Case to fin thermal resistance | $R_{th} \text{ (c-f)}$ | — | — | 0.013 | — | °C/W |

Switching Time Test Circuit & Timing Chart

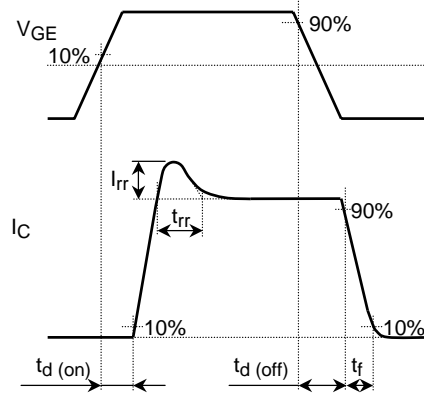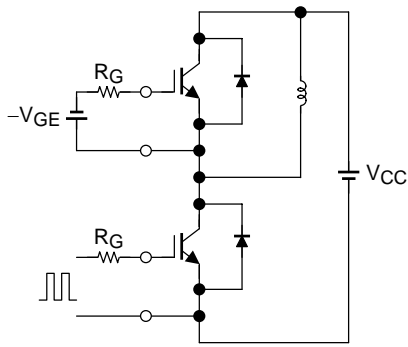

Recommended conditions for application

| Characteristics | Symbol | Min | Typ. | Max | Unit |
|-----------------------------------|----------|------|------|------|------|
| P-N power terminal supply voltage | V_{CC} | — | 300 | 400 | V |
| Gate voltage | V_{GE} | 13.5 | 15 | 16.5 | V |
| Switching frequency | f_c | — | — | 20 | kHz |