

WESTCODE SEMICONDUCTORS



Series

SWxxC/DXC22C

Capsule Rectifier Diode

Consists of a diffused silicon element mounted in an hermetic ceramic cold welded capsule. Available in industry standard and thin housings.

Ratings	Unless otherwise stated $T_j = 190^\circ\text{C}$	Maximum Limits							Units
		02	04	06	08	10	12	14	
V_{RRM}	Repetitive peak reverse voltage.	200	400	600	800	1000	1200	1400	V
V_{RSM}	Non-repetitive peak reverse voltage.	300	500	700	900	1100	1300	1500	V

$I_{F(AV)}$	Average forward current	Half sine wave	55°C heatsink temperature (double side cooled) 100°C heatsink temperature (single side cooled)					5440	A
$I_{F(RMS)}$	R.M.S forward current	25°C heatsink temperature, double side cooled					9700	A	
I_F	Continuous forward current	25°C heatsink temperature, double side cooled					8470	A	
$I_{FSM(1)}$	Peak one-cycle surge	10ms duration, 60% V_{RRM} re-applied					52.0	KA	
$I_{FSM(2)}$	Peak one-cycle surge	10ms duration, $V_R \leq 10$ volts					57.0	KA	
$I^2 t_{(2)}$	Maximum permissible surge energy	10ms duration, $V_R \leq 10$ volts					16.2×10^6	$A^2 s$	
		3ms duration, $V_R \leq 10$ volts					12.6×10^6	$A^2 s$	
T_j	Operating temperature range						-55 to + 190	°C	
T_{stg}	Storage temperature range						-55 to + 200	°C	

Characteristics		Unless otherwise indicated $T_j = 190^\circ\text{C}$		
V_{FM}	Peak forward voltage	$I_F = 6800$ A	1.11	V
V_O	Forward conduction threshold voltage		0.65	V
r	Forward conduction slope resistance		0.067	mΩ
I_{RRM}	Repetitive peak reverse current	At V_{RRM}	60.0	mA
$R_{th(j-hs)}$	Thermal resistance, junction to heat sink.	Double side cooled	0.016	°C/W
		Single side cooled	0.032	°C/W

Ordering Information (Please quote device code as explained below - 10 digits)

S	W	• •	• X C	2 2 C
Fixed type code	Voltage Code (see ratings)	CXC - Thick Housing DXC - Thin Housing	Fixed Type Code	

Typical code : SW10CXC22C, 1000 V_{RRM}

Details of a full range of capsule mounting clamps are available - ask for brochure.

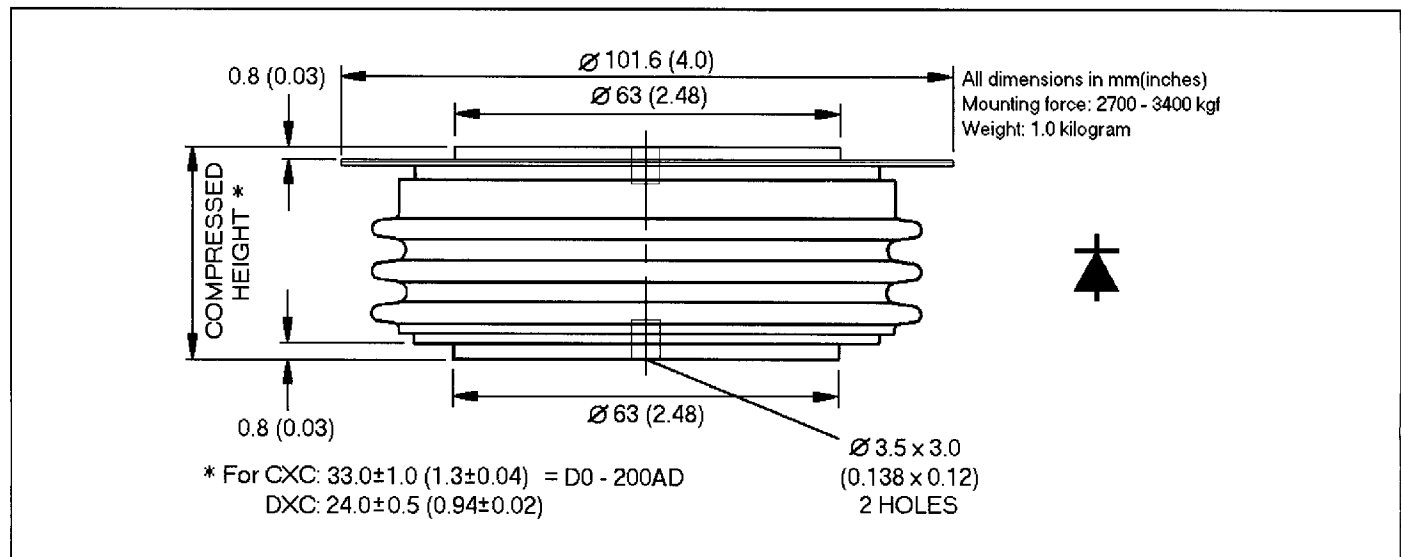


Figure 1. Dissipation/Sink Temperature v. Mean Forward Current.

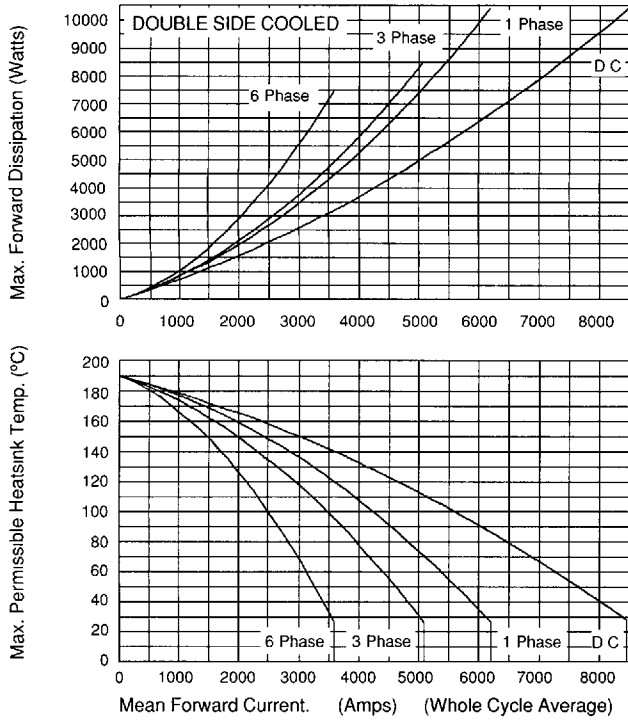


Figure 2. Dissipation/Sink Temperature v. Mean Forward Current.

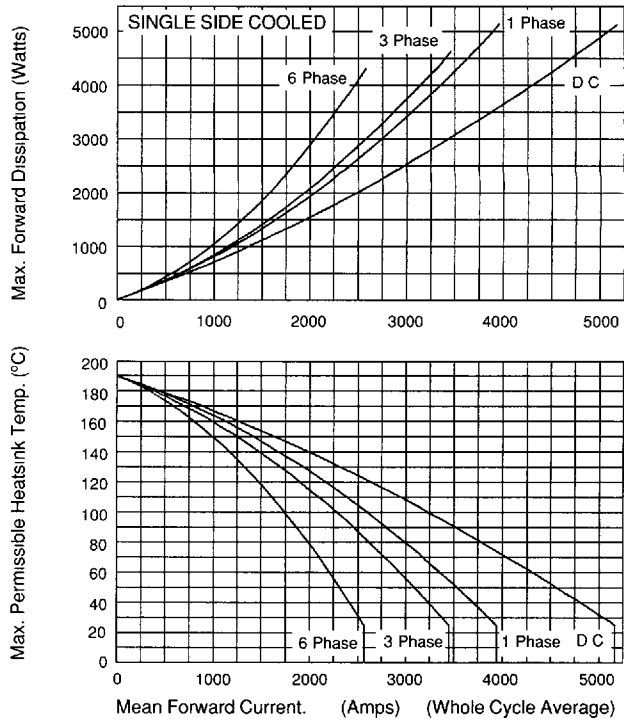


Figure 3. Limit Forward Characteristic at 190°C.

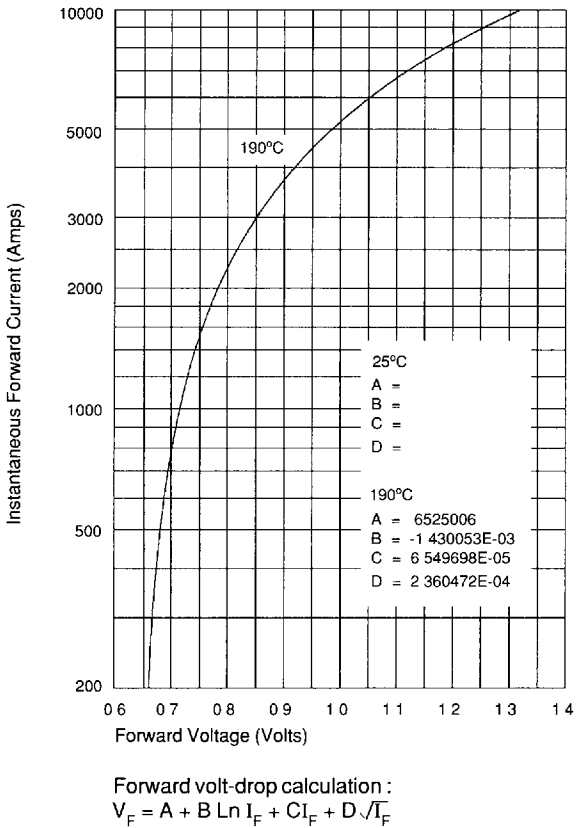


Figure 4. Junction to Sink Transient Thermal Impedance.


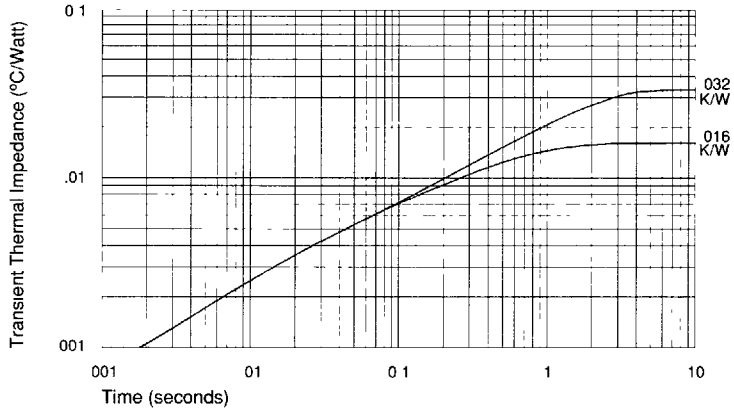


Figure 5. Non-Repetitive Surge Current at Initial Junction Temperature 190°C.



In the interest of product improvement, Westcode reserves the right to change specifications at any time without notice. © Westcode Semiconductors Ltd.

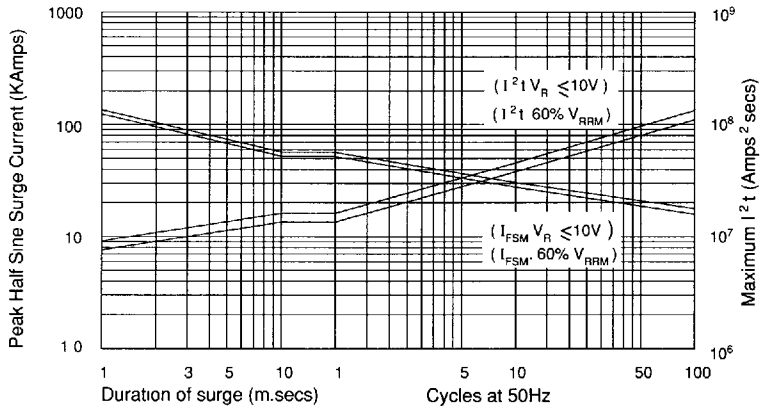

WESTCODE SEMICONDUCTORS LIMITED
 P.O. BOX 57, Chippenham, Wiltshire, England SN15 1JL
 Telephone (Sales) : (0249) 444524. Telex 44751.
 Telefax : (0249) 659448