


International **IR** Rectifier

QUIETIR Series 80EPF.. HV

FAST SOFT RECOVERY RECTIFIER DIODE

| | |
|---|---|
|  | $V_F < 1.2\text{ V @ }40\text{ A}$ $t_{rr} = 90\text{ ns}$ $V_{RRM} 1000\text{ to }1200\text{ V}$ |
|---|---|

Description/Features


The 80EPF.. fast soft recovery **QUIETIR** rectifier series has been optimized for combined short reverse recovery time and low forward voltage drop. The glass passivation ensures stable reliable operation in the most severe temperature and power cycling conditions.

Typical applications are both:

- output rectification and freewheeling in inverters, choppers and converters
- and input rectifications where severe restrictions on conducted EMI should be met.

Major Ratings and Characteristics

| Characteristics | 80EPF.. | Units |
|---------------------------------------|--------------|------------------|
| $I_{F(AV)}$ Sinusoidal waveform | 80 | A |
| V_{RRM} | 1000 to 1200 | V |
| I_{FSM} | 1100 | A |
| V_F @40 A, $T_J = 25^\circ\text{C}$ | 1.2 | V |
| t_{rr} @1 A, -100 A/ μs | 90 | ns |
| T_J | -40 to 150 | $^\circ\text{C}$ |

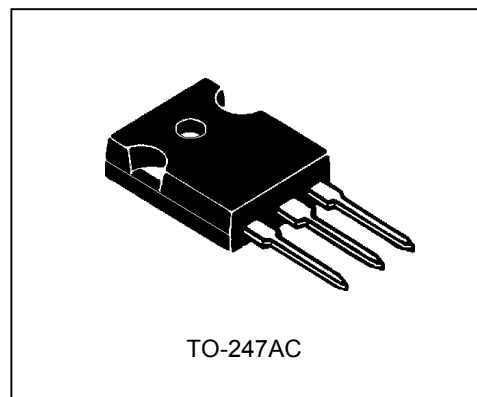

Voltage Ratings

| Part Number | V_{RRM} , maximum peak reverse voltage V | V_{RSM} , maximum non repetitive peak reverse voltage V | I_{RRM} 150°C mA |
|-------------|---|--|--------------------------|
| 80EPF10 | 1000 | 1100 | 12 |
| 80EPF12 | 1200 | 1300 | |

Absolute Maximum Ratings

| Parameters | 80EPF.. | Units | Conditions |
|--|---------|---------------|---|
| $I_{F(AV)}$ Max. Average Forward Current | 80 | A | @ $T_C = 92^\circ\text{C}$, 180° conduction half sine wave |
| I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current | 1100 | A | 10ms Sine pulse, rated V_{RRM} applied |
| | 1250 | | 10ms Sine pulse, no voltage reapplied |
| I^2t Max. I^2t for fusing | 5000 | A^2s | 10ms Sine pulse, rated V_{RRM} applied |
| | 7000 | | 10ms Sine pulse, no voltage reapplied |
| $I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ for fusing | 70000 | $A^2\sqrt{s}$ | $t = 0.1$ to 10ms, no voltage reapplied |


Electrical Specifications

| Parameters | 80EPF.. | Units | Conditions |
|---------------------------------------|---------|-----------|---------------------------------|
| V_{FM} Max. Forward Voltage Drop | 1.35 | V | @ 80A, $T_J = 25^\circ\text{C}$ |
| r_t Forward slope resistance | 4.03 | $m\Omega$ | $T_J = 150^\circ\text{C}$ |
| $V_{F(TO)}$ Threshold voltage | 0.87 | V | |
| I_{RM} Max. Reverse Leakage Current | 0.1 | mA | $T_J = 25^\circ\text{C}$ |
| | 12 | | $T_J = 150^\circ\text{C}$ |

$V_R = \text{rated } V_{RRM}$

Recovery Characteristics

| Parameters | 80EPF.. | Units | Conditions |
|-----------------------------------|---------|---------------|--|
| t_{rr} Reverse Recovery Time | 480 | ns | $I_F @ 80\text{Apk}$ @ 25A/ μs @ 25°C |
| I_{rr} Reverse Recovery Current | 7.1 | A | |
| Q_{rr} Reverse Recovery Charge | 2.1 | μC | |
| S Snap Factor | 0.5 | | |



Thermal-Mechanical Specifications

| Parameters | | 80EPF.. | Units | Conditions |
|------------|--|------------|--------|--------------------------------------|
| T_J | Max. Junction Temperature Range | -40 to 150 | °C | |
| T_{stg} | Max. Storage Temperature Range | -40 to 150 | °C | |
| R_{thJC} | Max. Thermal Resistance Junction to Case | 0.35 | °C/W | DC operation |
| R_{thJA} | Max. Thermal Resistance Junction to Ambient | 40 | °C/W | |
| R_{thCS} | Typical Thermal Resistance, Case to Heatsink | 0.2 | °C/W | Mounting surface, smooth and greased |
| wt | Approximate Weight | 6(0.21) | g(oz.) | |
| T | Mounting Torque | Min. | 6(5) | Kg-cm (lbf-in) |
| | | Max. | 12(10) | |
| Case Style | | TO-247AC | JEDEC | |

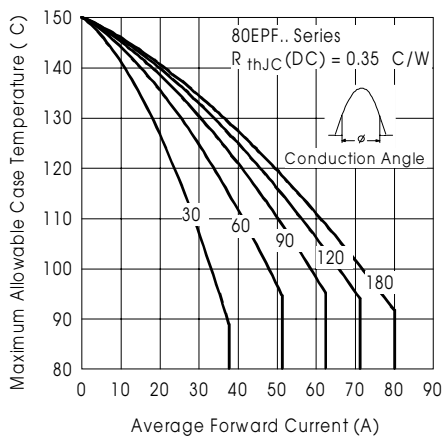


Fig. 1 - Current Rating Characteristics

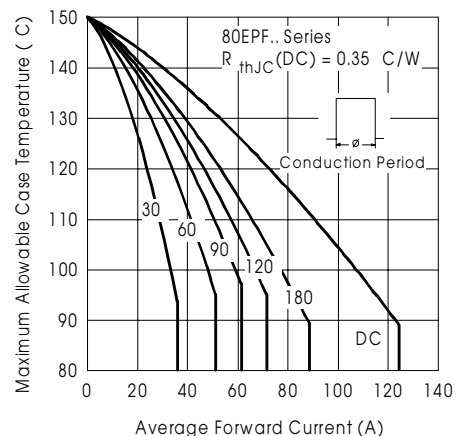


Fig. 2 - Current Rating Characteristics

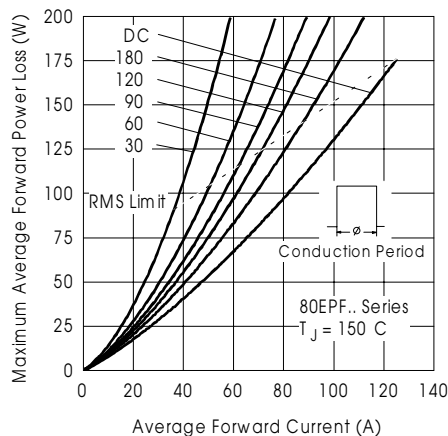


Fig. 3 - Forward Power Loss Characteristics

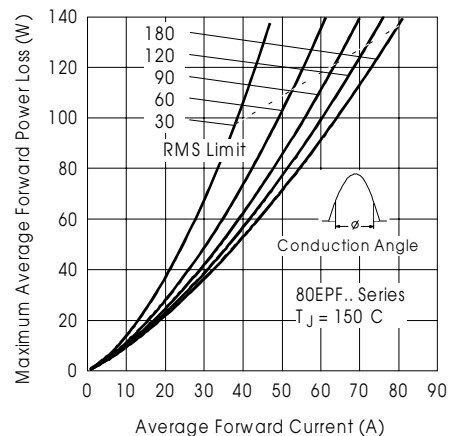


Fig. 4 - Forward Power Loss Characteristics

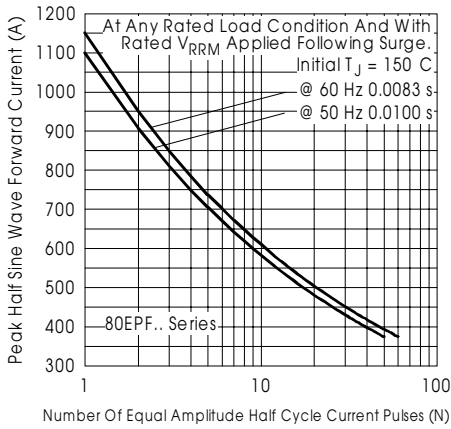


Fig. 5 - Maximum Non-Repetitive Surge Current

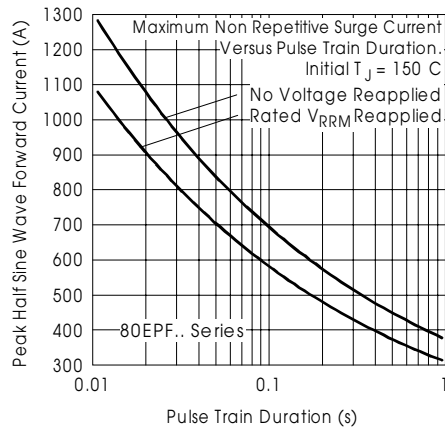


Fig. 6 - Maximum Non-Repetitive Surge Current

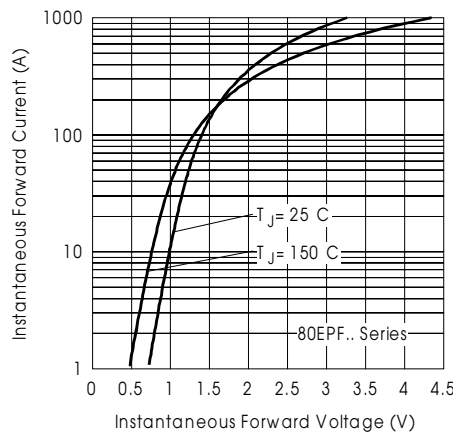


Fig. 7 - Forward Voltage Drop Characteristics

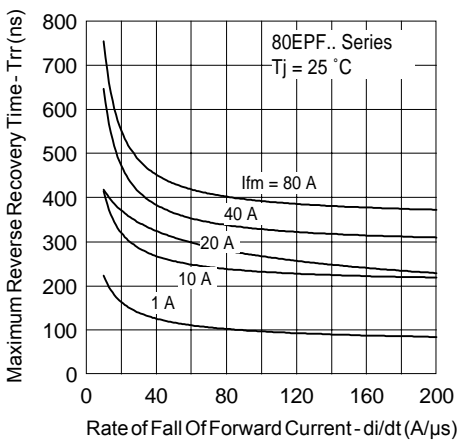


Fig. 8 - Recovery Time Characteristics, $T_J = 25^\circ\text{C}$

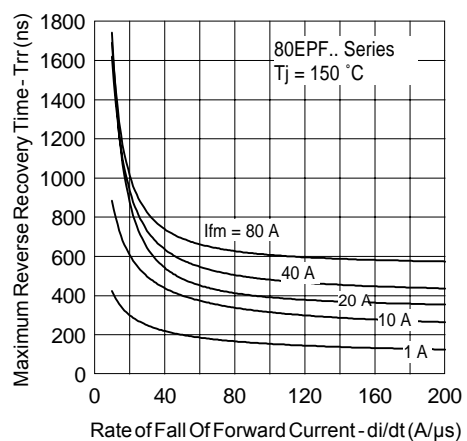


Fig. 9 - Recovery Time Characteristics, $T_J = 150^\circ\text{C}$

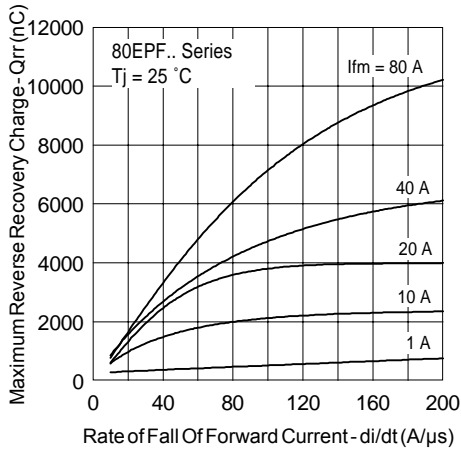


Fig. 10 - Recovery Charge Characteristics, $T_J = 25^\circ\text{C}$

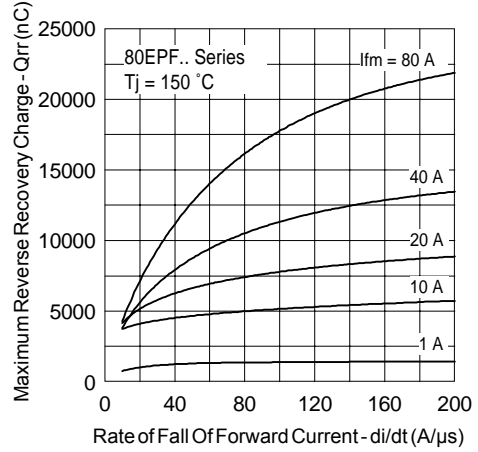


Fig. 11 - Recovery Charge Characteristics, $T_J = 150^\circ\text{C}$

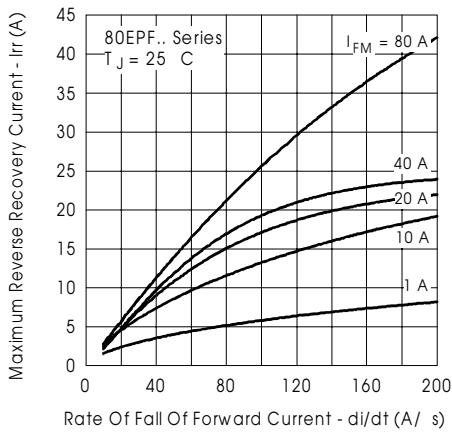


Fig. 12 - Recovery Current Characteristics, $T_J = 25^\circ\text{C}$

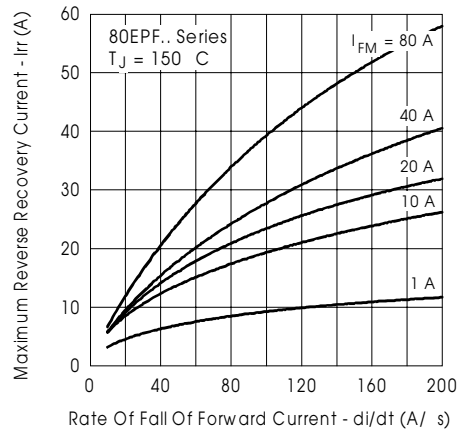


Fig. 13 - Recovery Current Characteristics, $T_J = 150^\circ\text{C}$



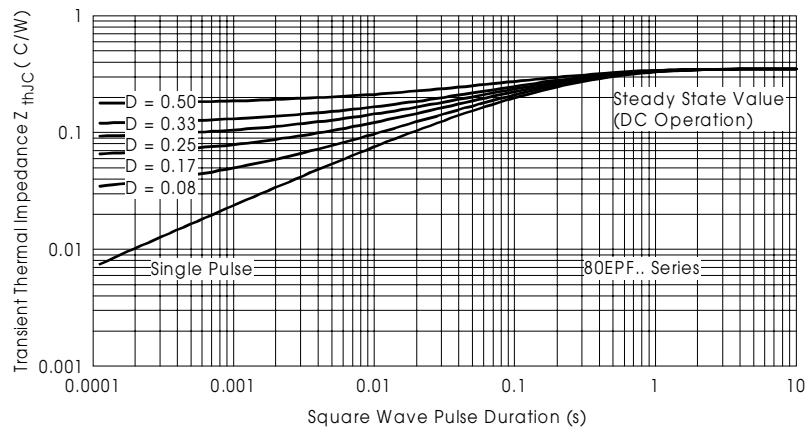


Fig. 14 - Thermal Impedance Z_{thJC} Characteristics

Outline Table

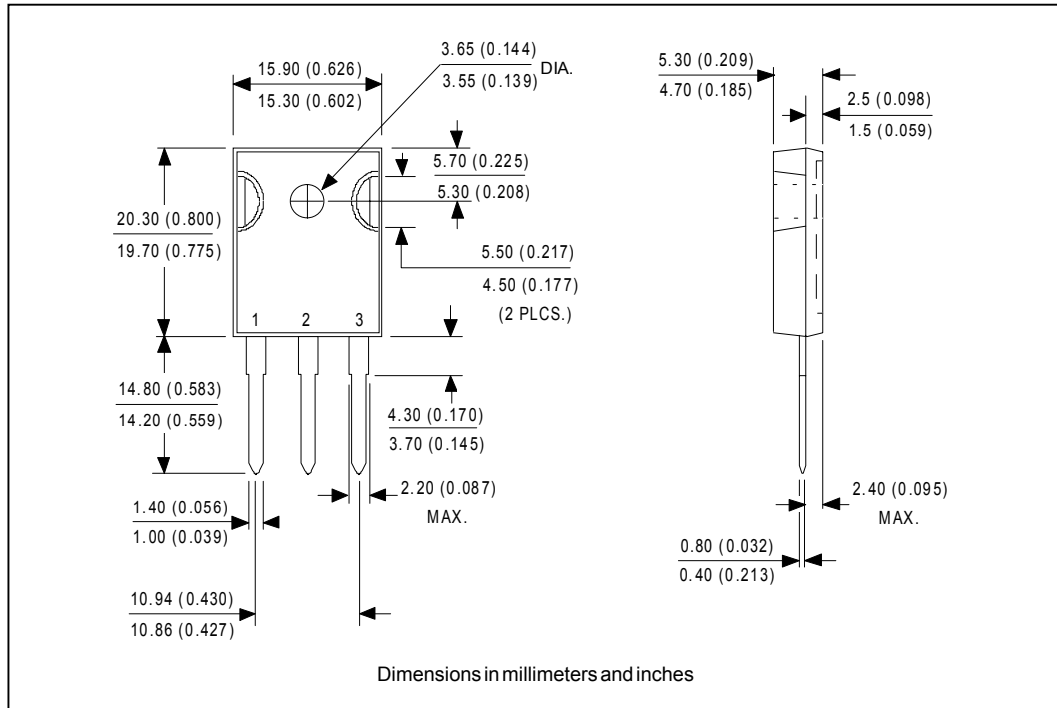

Ordering Information Table

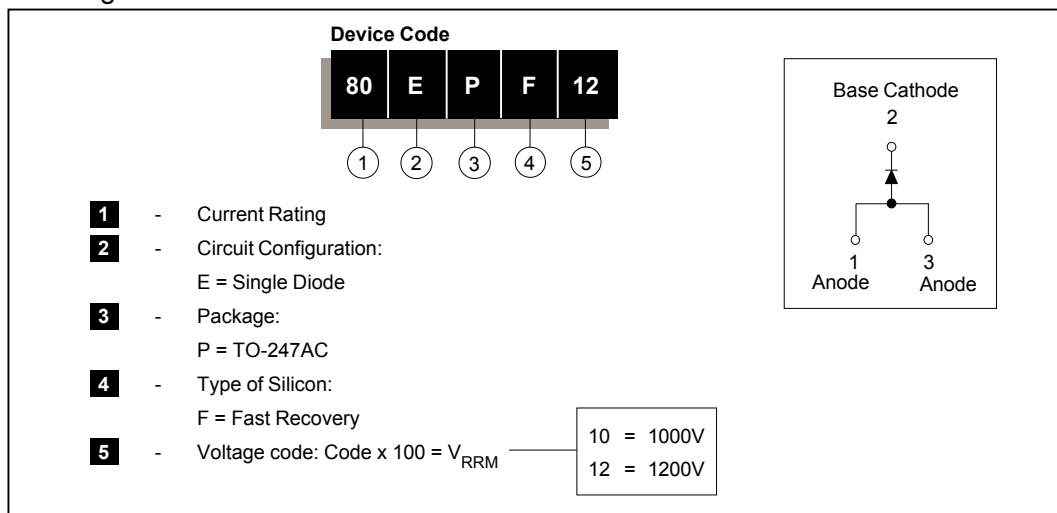

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309

Visit us at www.irf.com for sales contact information. 10/01